
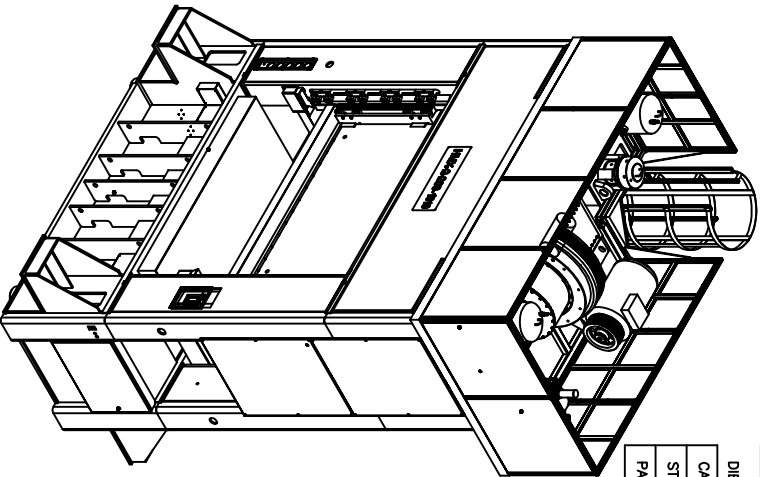
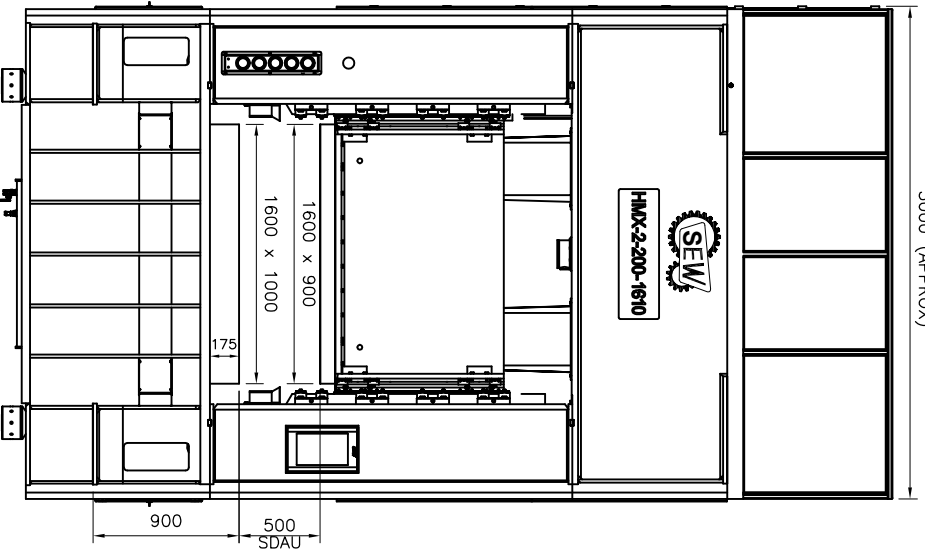


2150 (APPROX)

3000 (APPROX)

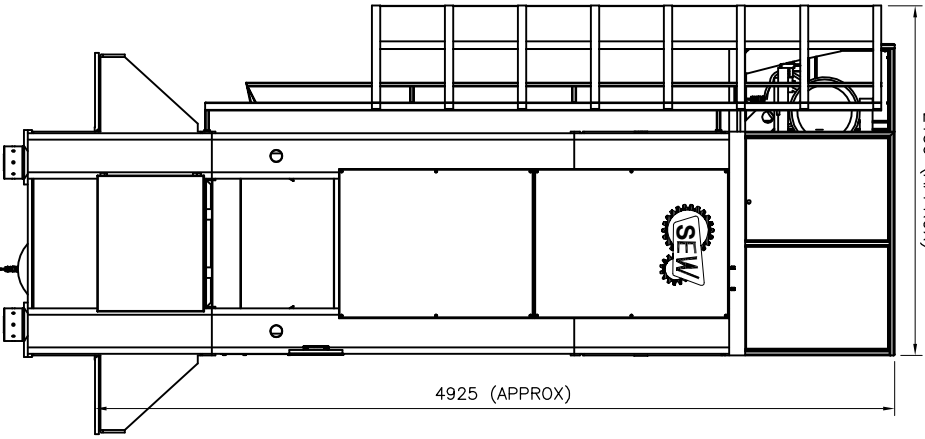

SPECIFICATION OF HMX-2-200


DESCRIPTION	
PRESS FORCE CAPACITY ● 6.5 mm FBOS	kN(t)
NUMBER OF SUSPENSION	2
STROKE LENGTH	mm
STROKE PER MINUTE (VARIABLE)	spm
SHUT HEIGHT(SDAU)(MAX DIE HEIGHT)	mm
SLIDE ADJUSTMENT	mm
BOLSTER AREA (LRxRB)	mm
SLIDE AREA (LRxRB)	mm
SIDE OPENING (FBxH)	mm
SLIDE GUIDING	mm
MAIN MOTOR	kW
FLOOR TO TOP OF BOLSTER (WITHOUT PAD)	mm
PRESS ACCORDING ACCURACY	mm
DRIVE	—
LUBRICATION	—

DIE CUSHION OPTIONAL

CAPACITY	kN(t)	280(28)
STROKE	mm	150
PAD AREA (LRxRB)	mm	740x540x2

NOTE:-DIMENSIONS AND SKETCHES ARE FOR REFERENCE ONLY

SINGHAL
POWER PRESSES PVT.LTD



DRAWN BY DP CHECKED BY VR APPROVED BY VR DATE 13/01/2020
DRG. NO. GA-HMX-2-200-100-08 SHEET 1 OF 1