

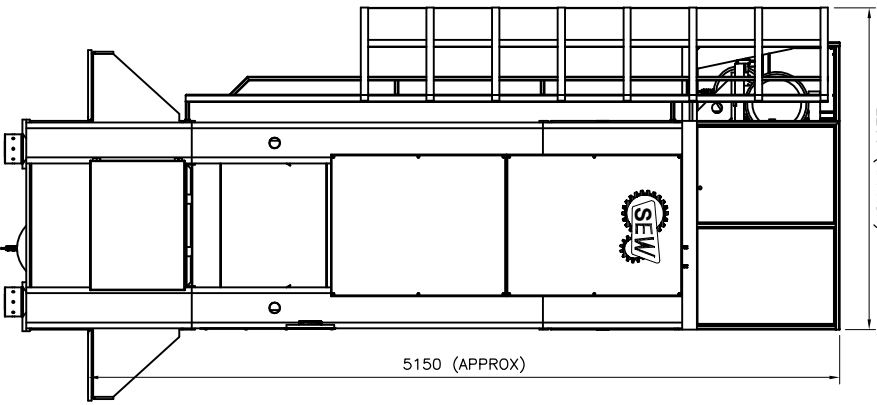


2200 (APPROX)

3575 (APPROX)

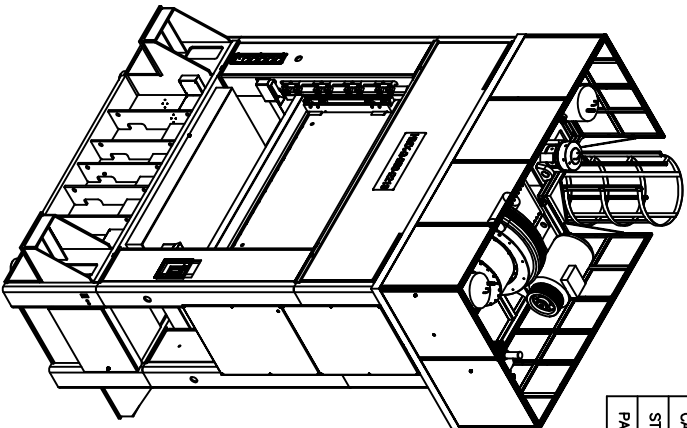

5150 (APPROX)

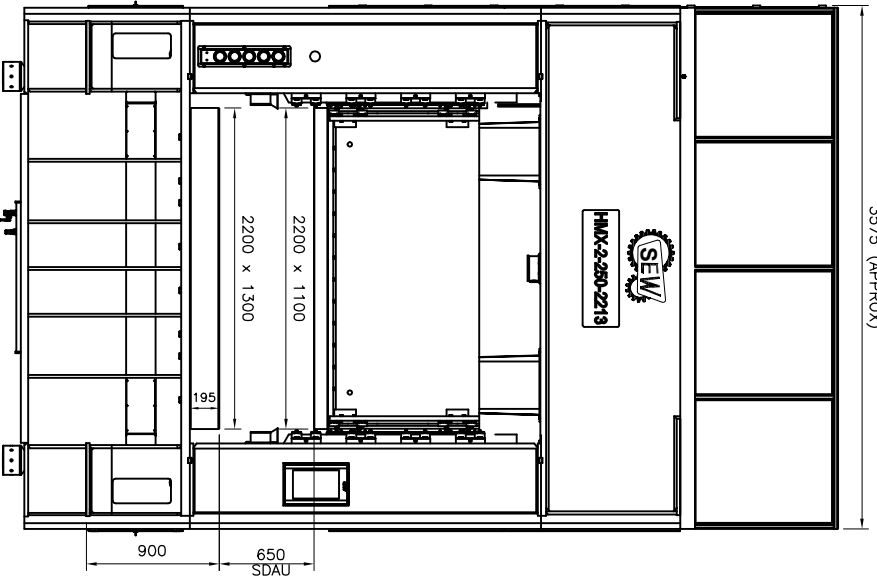

SPECIFICATION OF HMX-2-250

DESCRIPTION		UNIT
PRESS FORCE CAPACITY ● 6.5 mm FBOS	2500(250)	kN(t)
NUMBER OF SUSPENSION	2	
STROKE LENGTH	250	mm
STROKE PER MINUTE (VARIABLE)	35-65	spm
SHUT HEIGHT(SDAU)(MAX DIE HEIGHT)	650	mm
SLIDE ADJUSTMENT	150	mm
BOLSTER AREA (LRXFB)	2200x1300	mm
SLIDE AREA (LRXFB)	2200x1100	mm
SIDE OPENING (FBxH)	830x650	mm
SLIDE GUIDING	8 POINT FLAT	
MAIN MOTOR	30	kW
FLOOR TO TOP OF BOLSTER (WITHOUT PAD)	900	mm
PRESS ACCORDING ACCURACY	JIS 6402-1985	
DRIVE	CENTRAL GEAR BOX	
LUBRICATION	CENTRALIZED RECIRCULATING OIL	

DIE CUSHION OPTIONAL

CAPACITY	280(28)	kN(t)
STROKE	150	mm
PAD AREA (LRXFB)	1780x800	mm

NOTE:-DIMENSIONS AND SKETCHES ARE FOR REFERENCE ONLY



DRG. NO.

GA-HMX-2-250-250-08

DRAWN BY	CHECKED BY	VR	APPROVED BY	VR	DATE
DP <td>VR <td></td> <td></td> <td></td> <td>13/01/2020</td> </td>	VR <td></td> <td></td> <td></td> <td>13/01/2020</td>				13/01/2020

SHEET 1 OF 1