

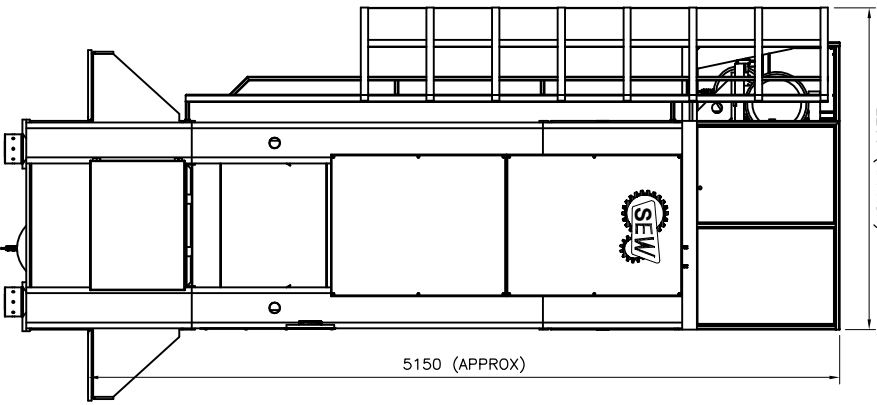


2200 (APPROX)

3575 (APPROX)

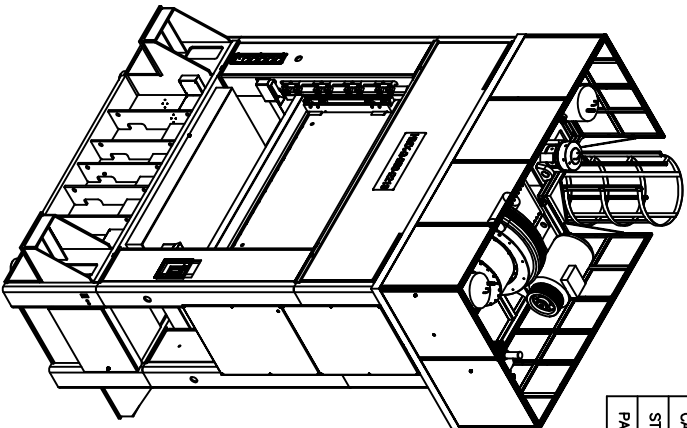

5150 (APPROX)

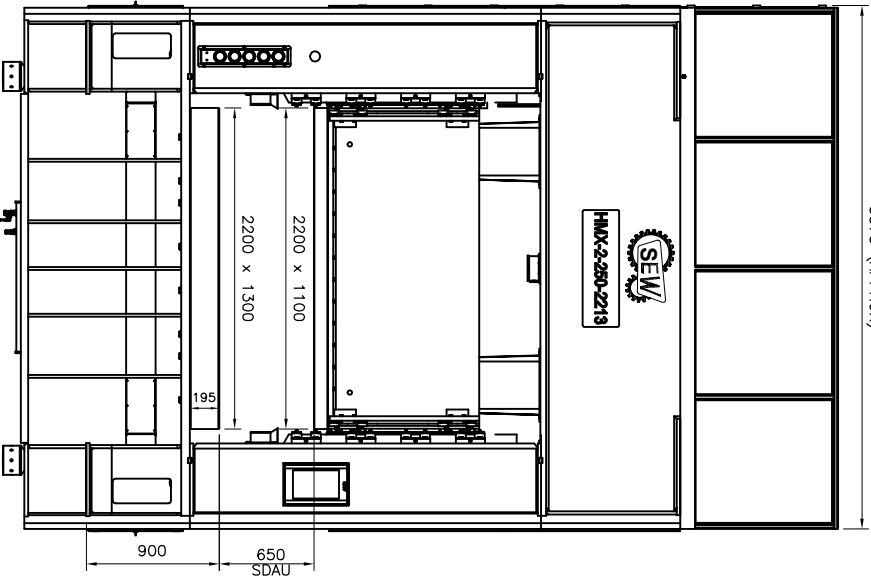

SPECIFICATION OF HMX-2-250

DESCRIPTION	
PRESS FORCE CAPACITY ● 6.5 mm FBOS	kN(t)
NUMBER OF SUSPENSION	2
STROKE LENGTH	mm
STROKE PER MINUTE (VARIABLE)	spm
SHUT HEIGHT(SDAU)(MAX DIE HEIGHT)	mm
SLIDE ADJUSTMENT	mm
BOLSTER AREA (LRXFB)	mm
SLIDE AREA (LRXFB)	mm
SIDE OPENING (FBxH)	mm
SLIDE GUIDING	—
MAIN MOTOR	kW
FLOOR TO TOP OF BOLSTER (WITHOUT PAD)	mm
PRESS ACCORDING ACCURACY	—
DRIVE	—
LUBRICATION	—

DIE CUSHION OPTIONAL

CAPACITY	kN(t)
STROKE	mm
PAD AREA (LRXFB)	mm

280(28)

150

1780x800

SINGHAL
POWER PRESSES PVT.LTD



DRG. NO.

GA-HMX-2-250-300-08

DRAWN BY DP CHECKED BY VR APPROVED BY VR DATE 13/01/2020

SHEET 1 OF 1

NOTE:-DIMENSIONS AND SKETCHES ARE FOR REFERENCE ONLY