
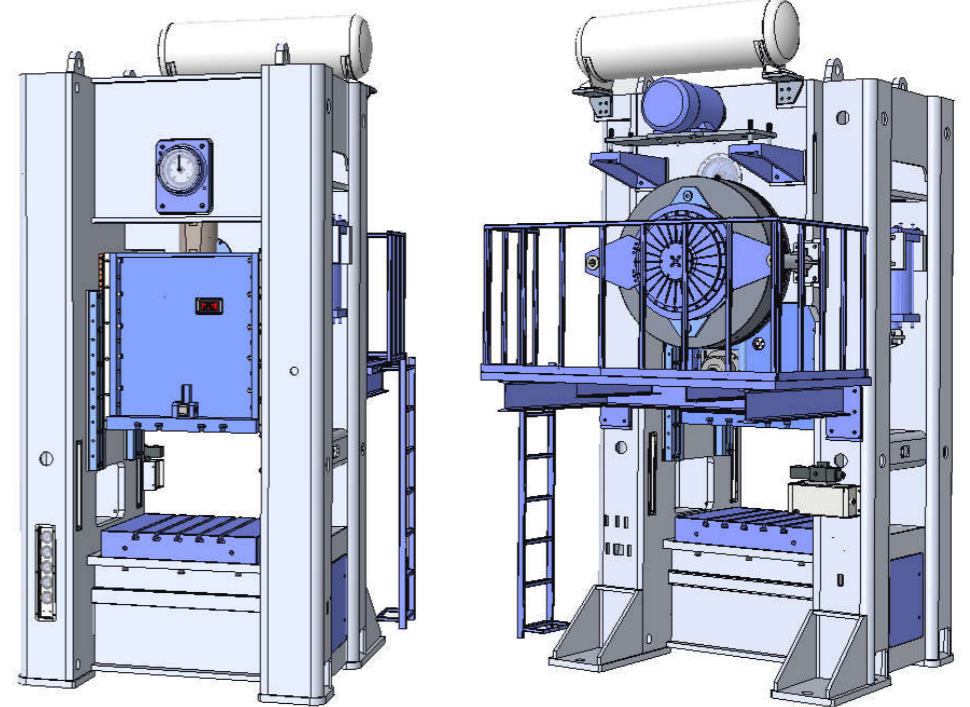
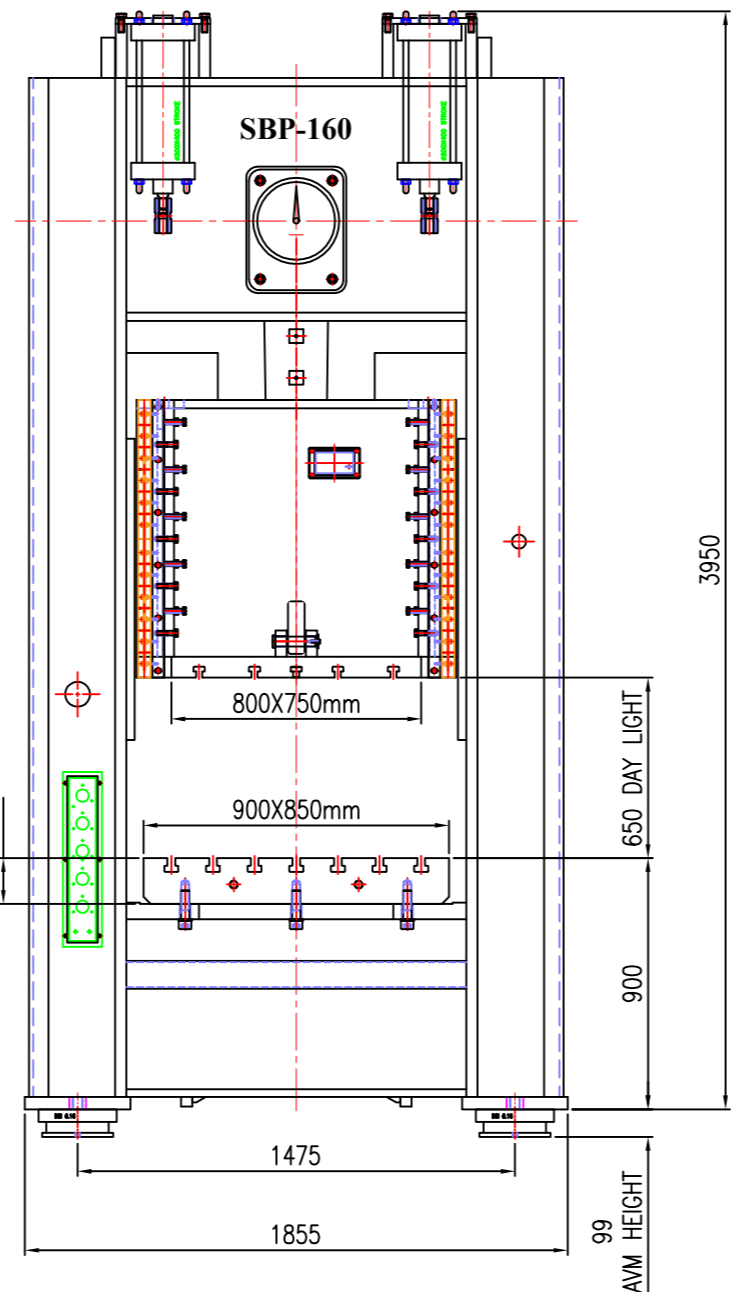
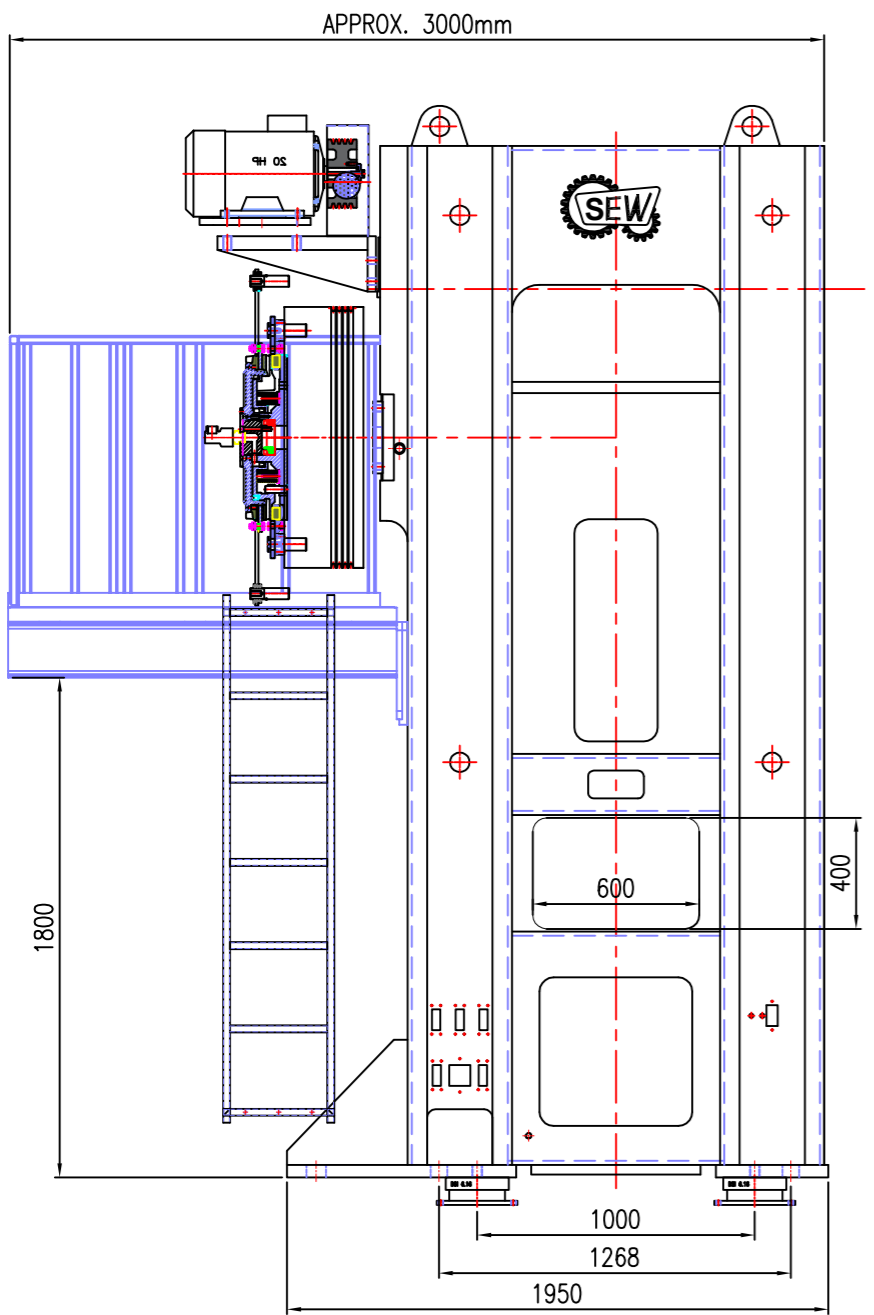


- NOTE:-
1. NO PIT REQUIRED
 2. AVM HEIGHT EXTRA
 3. MAINTENANCE PLATFORM AND LADDER ARE INCLUDED

SPECIFICATION OF SBP-160-SG [GEARED]	
PRESS CAPACITY IN TON	160 Ton
STROKE LENGTH (FIX)	200 mm
TONNAGE RATING POINT [B.D.C]	6 mm
SLIDE ADJUSTMENT	100mm
SLIDE AREA [LRxFB]	800x750 mm
DIE HEIGHT [SDAU]	450 mm
BOLSTER AREA [LRxFB]	900x850 mm
BOLSTER THICKNESS	155 mm
MACHINE SPM [FIX SPEED]	40
MAIN MOTOR [FOR FIX SPEED]	15 hp
MACHINE SPM [VARIABLE SPEED]	30~50
MAIN MOTOR [FOR VARIABLE SPEED]	20 hp
FLOOR TO TOP OF BOLSTER	900 mm
OVER LOAD SAFETY	HYD. OVER LOAD
LUBRICATION (GREASE)	MOTORIZED
CAM LIMIT SWITCH	ENCODER BASED E-CAMS

PNEUMATIC DIE CUSHION -OPTIONAL ACCESSORIES	
PNEUMATIC DIE CUSHION (PISTON TYPE)	10T
PNEUMATIC DIE CUSHION STROKE (FIXED)	120mm
PNEUMATIC DIE CUSHION PAD AREA	540 X 340mm

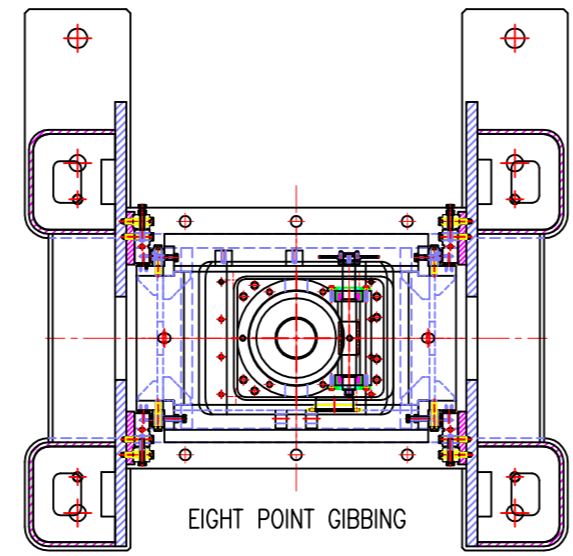

LINEAR DEVIATIONS WHERE NOT SPECIFIED								ANGULAR DEVIATIONS WHERE NOT SPECIFIED					
LENGTH mm	≤6	≤30	≤120	≤315	≤1000	≤2000	≤4000	≤8000	LENGTH mm SHORTER SIDE OF ANGLE	≤6	≤30	≤120	≤400
TOL.± mm	0.1	0.2	0.3	0.5	0.8	1.2	2	3	TOL. ON ANGLE ± DEG. / MIN.	1'	30'	20'	10'

SCALE	1:1	SURFACE FINISH	WEIGHT
DATE	15/01/2024		19 TON
DRAWN	DK	MATERIAL:	
CHKD.	DK		
APPD.	MS	NAME: G.A DRAWING-SG	
REV.		DRG.NO. SBP-160-08	


SINGHAL
 POWER PRESSES PVT.LTD

