



LEFT SIDE VIEW

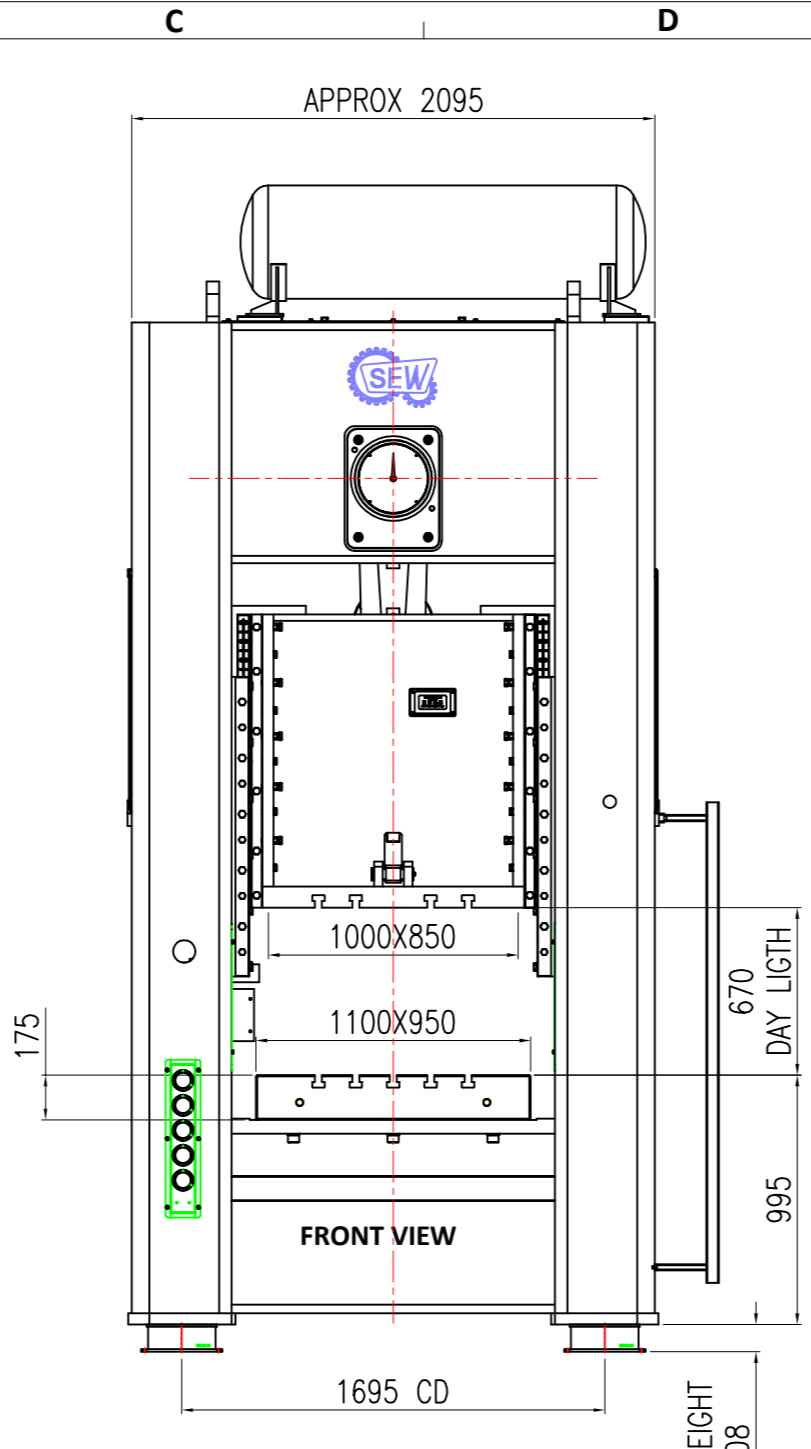


FRONT VIEW

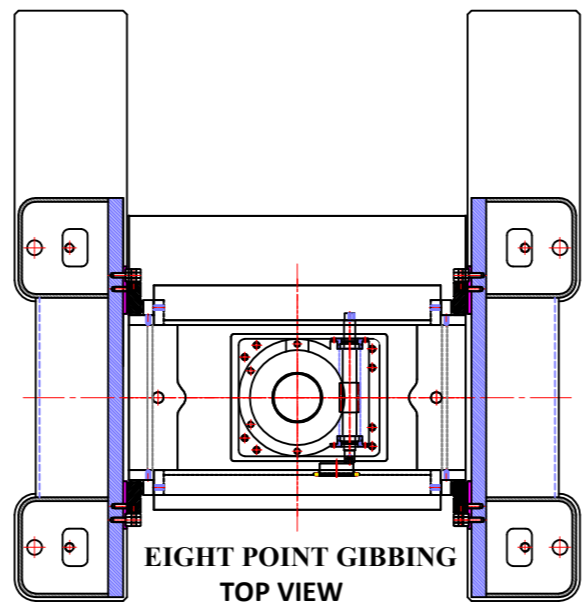

SPECIFICATION OF SBP-200 SG [GEARED]	
PRESS CAPACITY IN TON	200 Ton (2000 KN)
STROKE LENGTH (FIX)	220 mm
TONNAGE RATING POINT [B.D.C]	06 mm
SLIDE ADJUSTMENT	110 mm
SLIDE AREA [LRxFB]	1000x850 mm
DIE HEIGHT [SDAU]	450 mm
BOLSTER AREA [LRxFB]	1100x950 mm
BOLSTER THICKNESS	175 mm
MACHINE SPEED [VARIBALE]	35 SPM
MAIN MOTOR [HP]	20 hp
MACHINE SPEED [FIX]	25~45 SPM
MAIN MOTOR [HP]	25 hp
FLOOR TO TOP OF BOLSTER	950 mm (W/O AVM)
OVER LOAD SAFETY	HYD. OVER LOAD
LUBRICATION (GREASE)	MOTORIZED
CAM LIMIT SWITCH	ENCODER BASED E-CAM

OPTIONAL ACCESSORIES - DIE CUSHION	
PNEUMATIC DIE CUSHION (PISTON CYLINDER)	15T
DIE CUSHION STK. LENGTH (FIXED)	140 mm
DIE CUSHION PAD AREA	640X440 mm

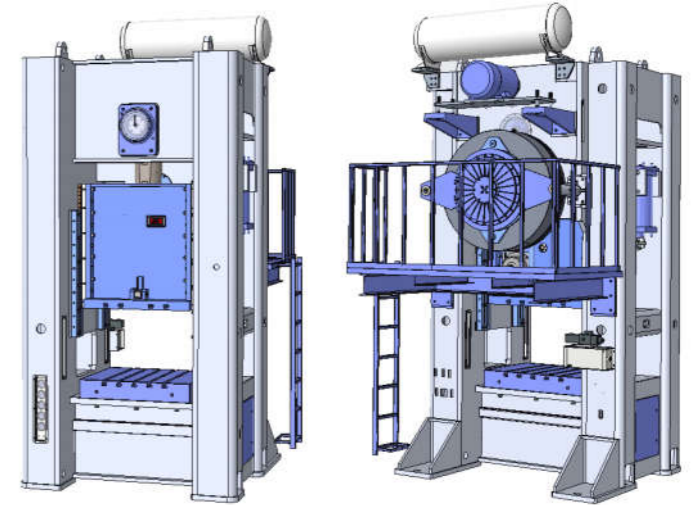

- NOTE:-
1. NO PIT REQUIRED
 2. AVM HEIGHT EXTRA
 3. MAINTENANCE PLATFORM AND LADDER ARE INCLUDED

SCALE	1:1	SURFACE FINISH	WEIGHT
DATE	15/01/2024		APPROX. 23 TON
DRAWN	DK		
CHKD.	DK	MATERIAL:	
APPD.	MS		
PROJECTION		NAME: G.A. DRAWING-SG	
		DRG.NO. SBP-200-08	



1

1

5

5

4

4

3

3

2

2

1

1

A

B

C

D

E

F