
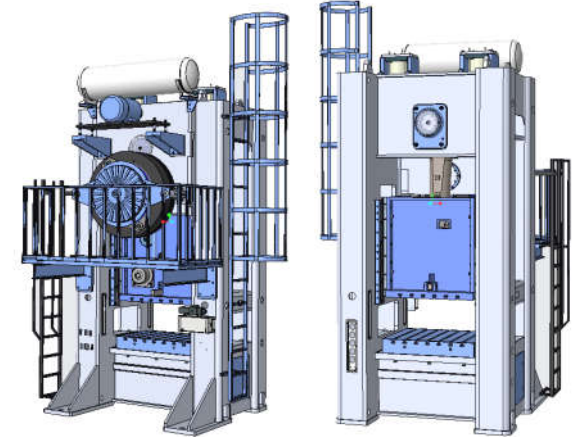
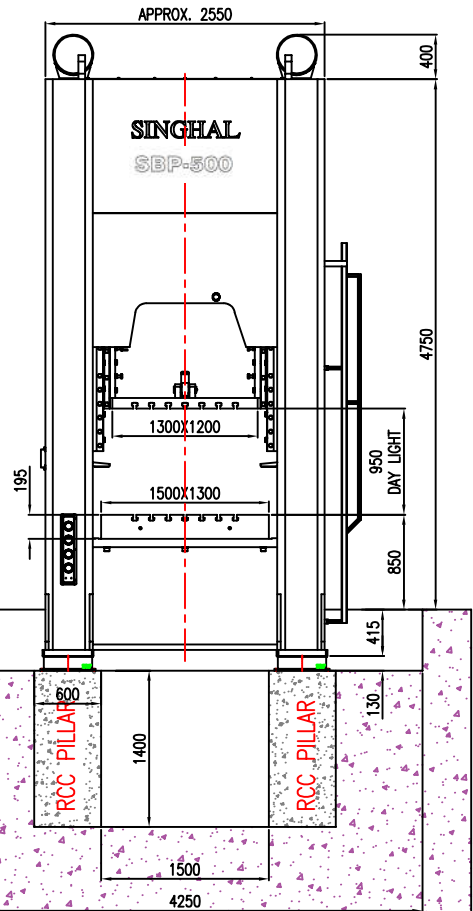


SPECIFICATION OF SBP-500 [GEARED]		
PRESS CAPACITY (4000 KN)	TON	500
STROKE LENGTH (FIX)	mm	300
TONNAGE RATING POINT [B.D.C]	mm	8
SPEED (FIX)	SPM	25
SPEED (VARIABLE)	SPM	20~30
DIE HEIGHT [SDAU]	mm	650
SLIDE ADJUSTMENT	mm	150
BOLSTER AREA [LRxFB]	mm	1500x1300
BOLSTER THICKNESS	mm	215
SLIDE AREA [LRxFB]	mm	1300x1200
MAIN MOTOR (FIX SPEED)	HP	50
MAIN MOTOR (VARIABLE SPEED)	HP	60
FLOOR TO TOP OF BOLSTER	mm	850
OVER LOAD SAFETY	HYD. OVER LOAD	
LUBRICATION	MOTORIZED (GREASE)	

PNEUMATIC DIE CUSHION (OPTIONAL ACCESSORIES)	
DIE CUSHION TONNAGE	40 TON (20TX2 STAGE)
DC STROKE LENGTH (FIX)	150 mm
PRESSURE PAD AREA	850X550

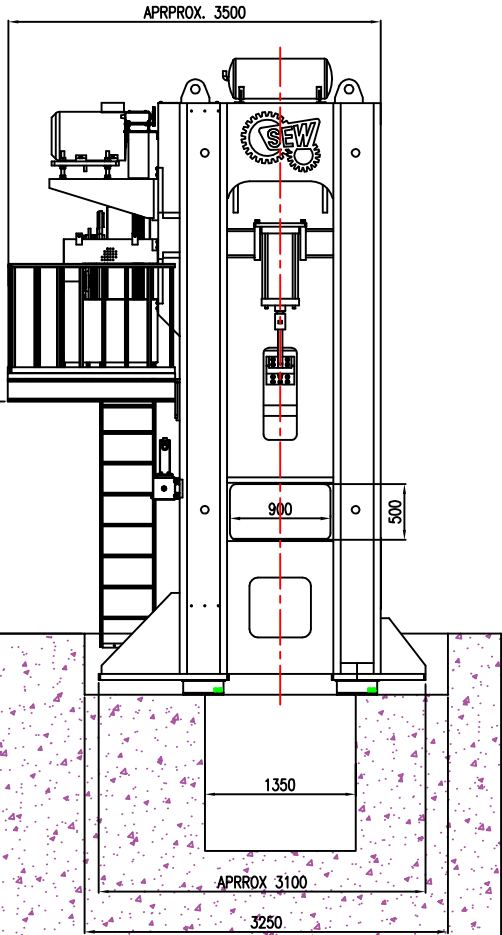

TENTATIVE IMAGE

SCALE	1:1	SURFACE FINISH	WEIGHT
DATE	15/01/2024		
DRAWN	DK	MATERIAL:	
CHKD.	DK		
APPD.	MS		
PROJECTION		NAME:	G.A DRAWING
		DRG.NO.	SBP-500-08

CLIENT:

SEW **SINGHAL**
POWER PRESSES PVT.LTD