


SPECIFICATION OF SNX-2-160 SG MODEL

CAPACITY IN TON	160 (1600 KN)
NO. OF SUSPENSION	02
STROKE LENGTH (FIXED)	200 mm
SPEED (FIX SPM)	40 SPM
SPEED (VARIABLE SPM)	30~50 SPM
DRIVE	GEARED
TONAGE RATING POINT(B.D.C.)	6 mm
SHUT HEIGHT FROM BOLSTER	450 mm
SLIDE ADJUSTMENT (MOTORIZED)	100 mm
BOLSTER AREA	2040 X 760 mm
BOLSTER THICKNESS	155 mm
SLIDE AREA	1560 X 580 mm
MAIN MOTOR (FIX SPM)	15 hp
MAIN MOTOR (VARIABLE SPM)	20 hp
FLOOR TO TOP OF BOLSTER	1000 mm
LUBRICATION	MOTORISED GREASE

OPTIONAL ACCESSORIES - DIE CUSHION

CAPACITY	8 TON X 2
DIE CUSHION STROKE LENGTH	90 mm
DIE CUSHION PAD AREA	1120 X 370

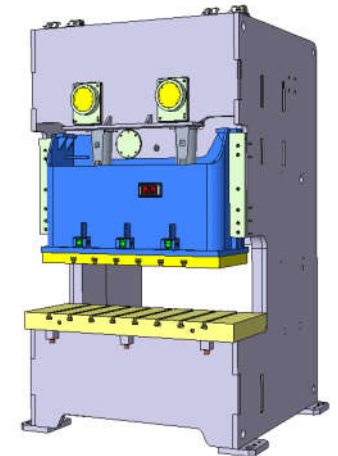

LINEAR DEVIATIONS WHERE NOT SPECIFIED									ANGULAR DEVIATIONS WHERE NOT SPECIFIED									
LENGTH mm	≤6	≤30	≤120	≤315	≤1000	≤2000	≤4000	≤8000	LENGTH mm SHORTER SIDE OF ANGLE	≤6	≤30	≤120	≤400					
TOL.± mm	0.1	0.2	0.3	0.5	0.8	1.2	2	3	TOL. ON ANGLE ± DEG. / MIN.	1'	30'	20'	10'					

MODEL: SNX-2-160 SG		QTY		SURFACE FINISH		WEIGHT	
SCALE	1:1					19 TON	
DATE	15/01/2024						
DRAWN	DK						
CHKD.	DK			MATERIAL:			
APPD.	MS						
REV.	DESCRIPTION	SIGN	DATE	PROJECTION		NAME: G.A DRAWING	
						DRG.NO. SNX-2-160-8 SG	



SINGHAL
POWER PRESSES PVT.LTD

