


SPECIFICATION OF SNXR-160 TONNE [GEARED]

- PRESS CAPACITY IN TONNE ----- 160 Tonne
- STROKE LENGTH [FIX.] ----- 200 mm
- TONNAGE RATING POINT [B.D.C.] - 6 mm
- SLIDE ADJUSTMENT ----- 120 mm [MOTORISED]
- SLIDE AREA [LRxRB] ----- 720x580 mm
- DIE HEIGHT [SDAU] ----- 450 mm
- BOLSTER AREA [LRxFB] ----- 1150x760 mm
- BOLSTER THICKNESS ----- 160 mm
- MACHINE SPM. (FIXED) ----- 40
- MAIN MOTOR [HP x P] ----- 15x4P
- MACHINE SPM. (VARIABLE) ----- 30~50
- MAIN MOTOR [HP x P] ----- 20x4P
- FLOOR TO TOP OF BOLSTER ---- 900 mm
- OVER LOAD SAFETY ----- HYD. OVER LOAD
- LUBRICATION ----- MOTORISED GREASE LUB.
- CAM LIMIT 8 POINT IMPORTED

DIE CUSHION (OPTION)

- PNEUMATIC DIE CUSHION ----- 10 Tonne.
- DIE CUSHION STK. LENGTH ----- 100 mm
- DIE CUSHION PAD AREA ----- 540x340 mm

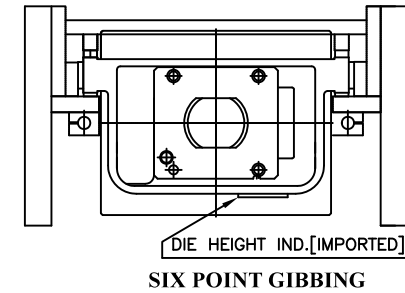

				SCALE		WEIGHT(KGS)
				DATE	16/01/2020	NAME : G.A.DRAWING
				DRAWN	CHIRAG	
				CHKD.	VR	
				APPD.	VR	
REV.	DESCRIPTION	SIGN	DATE	PROJECTION		DRG.NO. SNXR-160-SG-FS-08
SINGHAL POWER PRESSES PVT.LTD						