


**SPECIFICATION OF SNXR-45 TONNE [GEARED]**

- PRESS CAPACITY IN TONNE ----- 45 Tonne
- STROKE LENGTH [FIX.] ----- 110 mm
- TONNAGE RATING POINT [B.D.C.] - 3.2 mm
- SLIDE ADJUSTMENT ----- 60 mm [MOTORISED]
- SLIDE AREA [LRxRB] ----- 430x350 mm
- DIE HEIGHT [SDAU] ----- 270 mm
- BOLSTER AREA [LRxFB] ----- 800x440 mm
- BOLSTER THICKNESS ----- 110 mm
- MACHINE SPM. (FIXED) ----- 70
- MAIN MOTOR [HP x P] ----- 5x4P
- MACHINE SPM. (VARIABLE) ----- 50~80
- MAIN MOTOR [HP x P] ----- 7.5x4P
- FLOOR TO TOP OF BOLSTER ---- 850 mm
- OVER LOAD SAFETY ----- HYD. OVER LOAD
- LUBRICATION ----- MOTORISED GREASE LUB.
- CAM LIMIT 8 POINT IMPORTED

**DIE CUSHION (OPTION)**

- PNEUMATIC DIE CUSHION ----- 3.5 Tonne.
- DIE CUSHION STK. LENGTH ----- 50 mm
- DIE CUSHION PAD AREA ----- 320x210 mm

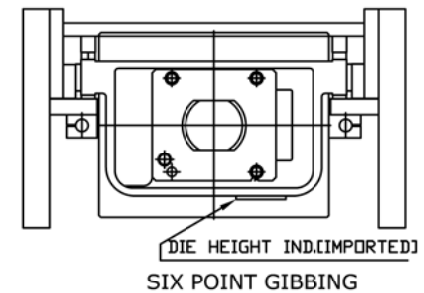

				SCALE		WEIGHT(KGS)
				DATE	13/01/2020	NAME :  <b>G.A.DRAWING</b>
				DRAWN	CHIRAG	
				CHKD.	VR	
				APPD.	VR	
REV.	DESCRIPTION	SIGN	DATE	PROJECTION		DRG.NO. <b>SNXR-45-SG-FS-08</b>
			<b>SINGHAL</b> POWER PRESSES PVT.LTD			