


SPECIFICATION OF SNXR-63 TONNE [GEARED]

PRESS CAPACITY IN TONNE ----- 63 Tonne
 STROKE LENGTH [FIX.] ----- 130 mm
 TONNAGE RATING POINT [B.D.C.] - 4 mm
 SLIDE ADJUSTMENT ----- 70 mm [MOTORISED]
 SLIDE AREA [LRxRB] ----- 500x400 mm
 DIE HEIGHT [SDAU] ----- 300 mm
 BOLSTER AREA [LRxFB] ----- 900x520 mm
 BOLSTER THICKNESS ----- 120 mm
 MACHINE SPM. (FIXED) ----- 60
 MAIN MOTOR [HP x P] ----- 7.5x4P
 MACHINE SPM. (VARIABLE) ----- 40~70
 MAIN MOTOR [HP x P] ----- 10x4P
 FLOOR TO TOP OF BOLSTER --- 860 mm
 OVER LOAD SAFETY ----- HYD. OVER LOAD
 LUBRICATION ----- MOTORISED GREASE LUB.
 CAM LIMIT 8 POINT IMPORTED

DIE CUSHION (OPTION)

PNEUMATIC DIE CUSHION ----- 6 Tonne.
 DIE CUSHION STK. LENGTH ----- 70 mm
 DIE CUSHION PAD AREA ----- 380x260 mm

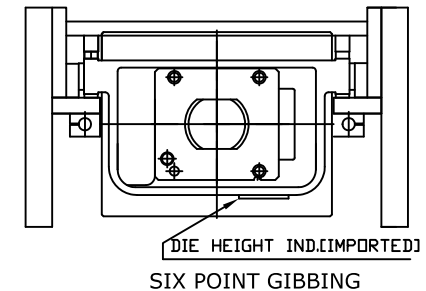

				SCALE		WEIGHT(KGS)
				DATE	13/01/2020	NAME : G.A.DRAWING
				DRAWN	CHIRAG	
				CHKD.	VR	
				APPD.	VR	
REV.	DESCRIPTION	SIGN	DATE	PROJECTION		DRG.NO. SNXR-63-SG-FS-08
				SINGHAL POWER PRESSES PVT.LTD		