


SPECIFICATION OF SNXR-80 TONNE [GEARED]

PRESS CAPACITY IN TONNE ----- 80 Tonne
 STROKE LENGTH [FIX.] ----- 150 mm
 TONNAGE RATING POINT [B.D.C.] - 4.5 mm
 SLIDE ADJUSTMENT ----- 80 mm [MOTORISED]
 SLIDE AREA [LRxRB] ----- 560x460 mm
 DIE HEIGHT [SDAU] ----- 330 mm
 BOLSTER AREA [LRxFB] ----- 900x600 mm
 BOLSTER THICKNESS ----- 140 mm
 MACHINE SPM. (FIXED) ----- 60
 MAIN MOTOR [HP x P] ----- 10x4P
 MACHINE SPM. (VARIABLE) ----- 40~70
 MAIN MOTOR [HP x P] ----- 15x4P
 FLOOR TO TOP OF BOLSTER --- 900 mm
 OVER LOAD SAFETY ----- HYD. OVER LOAD
 LUBRICATION ----- MOTORISED GREASE LUB.
 CAM LIMIT 8 POINT IMPORTED

DIE CUSHION (OPTION)

PNEUMATIC DIE CUSHION ----- 6 Tonne.
 DIE CUSHION STK. LENGTH ----- 70 mm
 DIE CUSHION PAD AREA ----- 410x260 mm

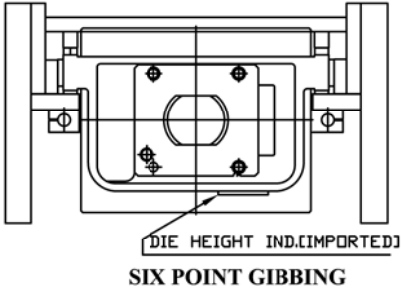

				SCALE		WEIGHT(KGS)
				DATE	13/01/2020	NAME : G.A.DRAWING
				DRAWN	CHIRAG	
				CHKD.	VR	
				APPD.	VR	
REV.	DESCRIPTION	SIGN	DATE	PROJECTION		DRG.NO.
						SNXR-80-SG-FS-08



SINGHAL
 POWER PRESSES PVT.LTD



SNXR-80-SG-FS-08