


SPECIFICATION OF SXP-2-160	
CAPACITY IN TON	160 (1600 KN)
NO. OF SUSPENSION	2
STROKE LENGTH (FIXED)	200 mm
SPEED (FIX)	40 SPM
SPEED (VARIABLE)	30~50 SPM
DRIVE	GEARED
TONAGE RATING POINT(B.D.C.)	6 mm
SHUT HEIGHT FROM BOLSTER	450 mm
SLIDE ADJUSTMENT	100 mm
BOLSTER AREA	1850x760 mm
BOLSTER THICKNESS	155 mm
SLIDE AREA	1560x650 mm
MAIN MOTOR (HPXRPM)	15X1440 (FIX SPEED)
MAIN MOTOR (HPXRPM)	20X1440 (VARIABLE SPEED)
FLOOR TO TOP OF BOLSTER W/OUT AVM	850 mm
LUBRICATION	MOTORISED GREASE
DIE CUSHION (OPTIONAL)	
PISTON CYLINDER TYPE	20 TON (10T X 2)
DIE CUSHION STROKE LENGTH (FIXED)	125 mm
DIE CUSHION PAD AREA	1200x700

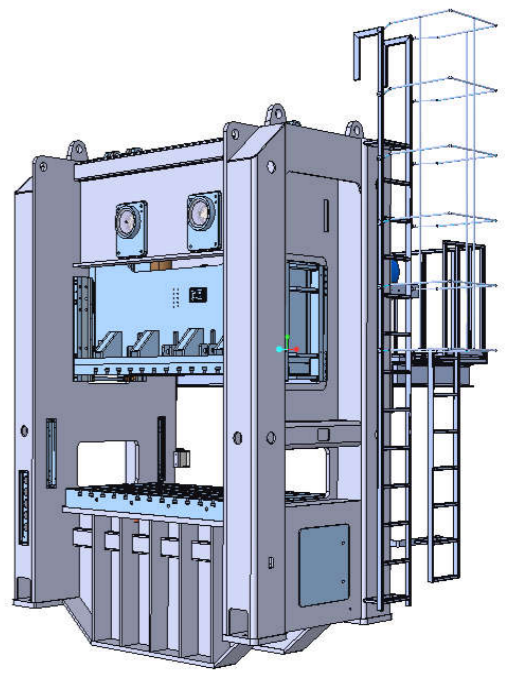

SCALE	1:1	SURFACE FINISH	WEIGHT
DATE	15/01/2024		APPROX. 28 TON
DRAWN	DK	MATERIAL:	
CHKD.	DK		
APPD.	MS		
PROJECTION		NAME:	
		G.A. DRAWING	
		DRG.NO. SXP-2-160-08	

SINGHAL
 POWER PRESSES PVT.LTD