

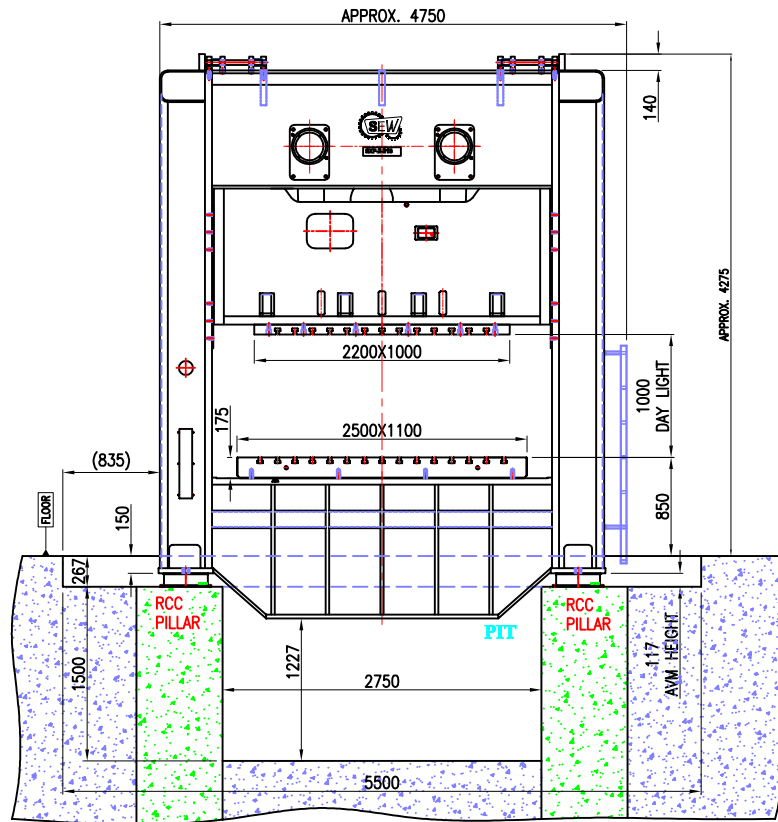


SPECIFICATION OF SXP-2-315	
CAPACITY IN TON	315 (3150 kN)
NO. OF SUSPENSION	2
STROKE LENGTH (FIXED)	300 mm
SPEED (FIXED SPM)	30 SPM
SPEED (VARIABLE SPM)	20~40 SPM
DRIVE	GEARED
TONNAGE RATING POINT(B.D.C.)	7 mm
SHUT HEIGHT FROM BOLSTER	700 mm
SLIDE ADJUSTMENT	150 mm
BOLSTER AREA	2500x1100 mm
BOLSTER THICKNESS	175 mm
SLIDE AREA	2200x1000 mm
MAIN MOTOR (FOR FIX SPM)	30 hp
MAIN MOTOR (FOR VARIABLE)	40 hp
FLOOR TO TOP OF BOLSTER (AVM IN PIT)	850 mm
LUBRICATION	MOTORISED GREASE

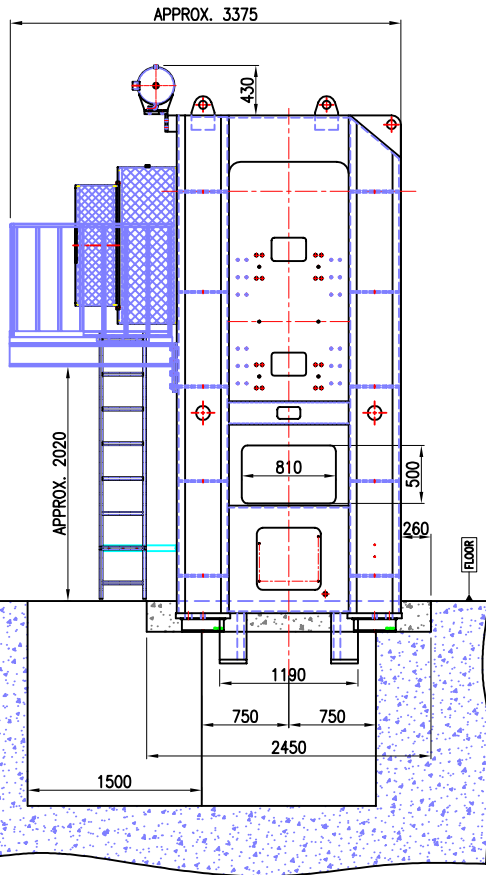


DIE CUSHION CAPACITY	
DIE CUSHION (PISTON CYLINDER TYPE)	15T X 2 STAGE (30 TON)
DIE CUSHION STROKE (FIXED TYPE)	150 mm
PRESSURE PAD AREA	1600 X 700 mm

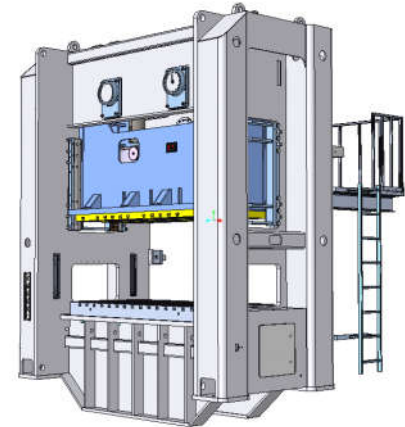

SCALE	1:1	SURFACE FINISH	MACHINE WGT.
DATE	15/01/2024		45.5 T
DRAWN	DK	MATERIAL:	
CHKD.	DK		
APPD.	MS		
REV.	DESCRIPTION	SIGN	DATE
PROJECTION		NAME: G.A DRAWING	
		DRG.NO. SXP-2-315-08	



SINGHAL
POWER PRESSES PVT.LTD



NAME: G.A DRAWING
DRG.NO. SXP-2-315-08